

CLEMM

User manual for the Wireless headphones CLEMM PRESET



Model: CWH-PST

Item number:
CWH-PST-GRE
CWH-PST-LVN
CWH-PST-WHT


PACKAGE CONTENTS

- Headphones – 1 pc.
- USB Type-C charging cable – 1 pc.
- AUX audio cable – 1 pc.
- User Manual – 1 pc.

Safety instructions

1. Design and Controls
2. Specifications
3. Powering On and Off
4. Pairing with an External Device
5. Using the Controls
6. LED Indicators
7. Charging Your Headphones
8. AUX-In Cable Connection Mode
9. Factory Reset
10. Safety Precautions
11. Care and Comfort
12. Troubleshooting
13. Safe Disposal Guidelines
14. Manufacturer and Importer Information

1. Design and Controls

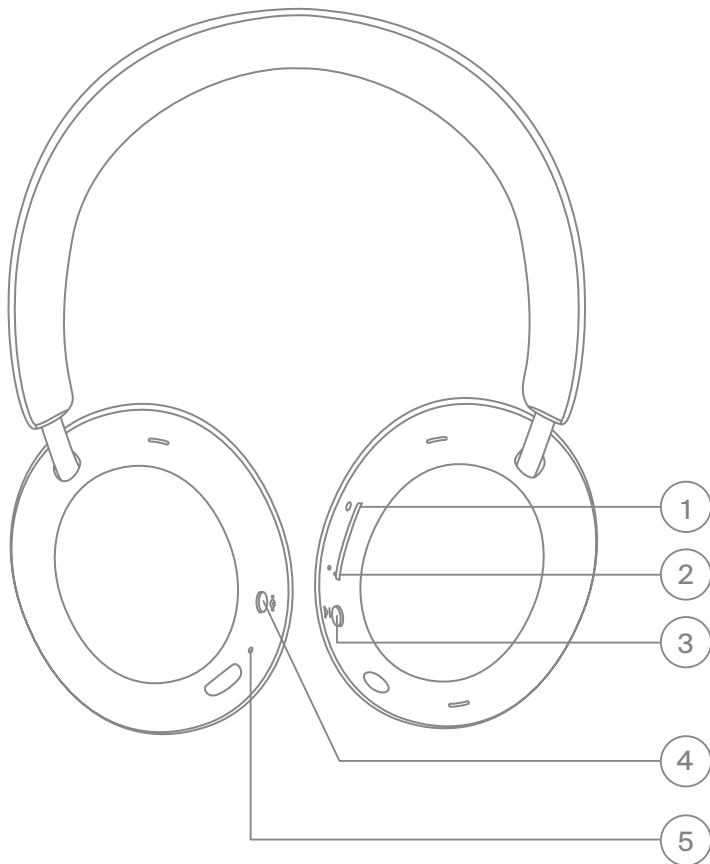

1. Volume Up / Next Track button
2. Volume Down / Previous Track button
3. Play / Pause button
4. LED indicator
5. Power button

2. Specifications

Bluetooth name: • Clemm Preset

Bluetooth: 5.3

Bluetooth profiles: A2DP, AVRCP, HFP, HSP

Audio codec support: SBC, AAC

Operating range: up to 10 meters (without obstacles)

Speaker diameter: 40 mm

Charging time: up to 2 hour.

Battery life at full volume: up to 95 hour

Battery capacity: 650 mAh, 2.405 Wh

Voltage: DC 3.7V

Rated frequency: 20-20,000 Hz

Impedance: 32 ohm $\pm$ 15% at 1 kHz

Sensitivity: 127 $\pm$ 3 dB at 1 kHz

Input voltage: 5 V $\approx$ 1 A

4. Powering On and Off

To turn on the headphones, press and hold the Power button on the left headphone for 2 seconds.

To turn off the headphones, press and hold the Power button on the left headphone for 3 seconds. If the headphones are not connected to a device within 5 minutes, they will turn off automatically.

5. Pairing with an External Device

To listen to music and take calls through your headphones, make sure that this feature is enabled in the Bluetooth menu on your device.

After turning on the headphones, connect them to a Bluetooth

1. Enable Bluetooth on your device.
2. Find and select • Clemm Preset in the Bluetooth menu.

Once the headphones are paired with the device, they can be used immediately. The maximum pairing distance for the headphones is 10 meters (33 feet). If the headphones are moved beyond the maximum pairing distance, the connection will be lost, and you will hear a disconnection sound. To reconnect the headphones, bring the device back within the range of the headphones within 5 minutes.

To disconnect the headphones from your device, turn off Bluetooth on your device. The headphones will enter pairing mode.

If you don't connect the headphones to a device within 5 minutes, they will turn off automatically. To reconnect the headphones to your device, turn them on and they will

automatically enter pairing mode with the last connected device. Make sure Bluetooth is turned on on your device.

To prevent the headphones from automatically connecting to your device, remove • Clemm Preset from your device's Bluetooth

6. Using the Controls

Play or pause	Press the Play/Pause button on the right headphone
Volume up	Press the Volume Up/Next Track button on the right headphone
Volume down	Press the Volume Down/Previous Track button on the right headphone
Previous track	Press and hold the Volume Down/Previous Track button on the right headphone for 2 seconds
Next track	Press the Volume Up/Next Track button on the right headphone for 2 seconds
Activate/deactivate voice assistant	Press the Play/Pause button on the right headphone 2 times
Answer call	Press the Play/Pause button on the right headphone
End call	Press the Play/Pause button on the right headphone
Reject call	Press and hold the Play/Pause button on the right headphone for 2 seconds

Reset	Press and hold the Play/Pause button on the right headphone for 10 seconds
-------	--

7. LED Indicators

Power on	LED indicator lights up white for 1 second
----------	--

Power off	LED indicator lights up white for 1 second and then turns off
-----------	---

Pairing	LED indicator flashes white
---------	-----------------------------

Headphones connected	LED indicator flashes white quickly 2 times
----------------------	---

Charging Your Headphones	LED indicator is solid red while charging
	LED indicator is solid green when the headphones are fully charged

Reset	LED indicator flashes white quickly 5 times
-------	---


8. Charging Your Headphones

When the battery level is low, you will hear a warning sound 20 and 10 minutes before the headphones turn off.

To charge, connect one end of the USB Type-C cable to the corresponding port on the headphones and the other end to a computer or charger. The LED indicator will be red while the headphones are charging. Once they are fully charged, the indicator light will turn green.

9. AUX-In Cable Connection Mode

With the headphones turned on, connect one end of the AUX audio cable to the corresponding port on the headphones and the other end to the device. The headset will automatically turn off.

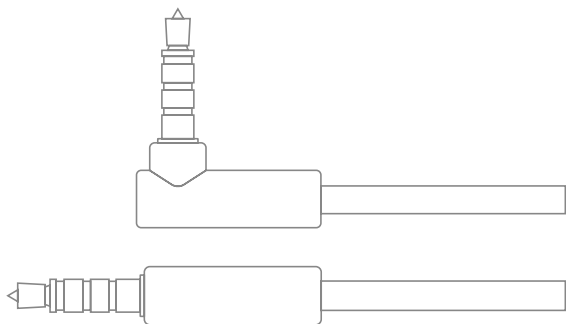

10. Factory Reset

1. Make sure the headphones are turned off.
2. Press and hold the Play/Pause button on the right headphone for 10 seconds until the indicator flashes white 5 times.
3. On the external device, delete the headphone entry from the Bluetooth history and repeat the pairing process with the headphones.

11. Safety Precautions

1. Before using the headphones, please read the safety precautions to ensure optimal performance and prevent potential hazards.
2. To protect your hearing, do not play content at high volumes for extended periods.
3. Some wireless devices may negatively impact the operation of pacemakers, cochlear implants, and hearing aids.
4. The minimum distance between a wireless device and medical equipment should be 15 cm (6 inches). For more detailed information, contact the manufacturer of the medical equipment.
5. For best performance and safety, use the headphones between -15°C and +60°C (5°F and 140°F).
6. When charging, the adapter should be plugged into a nearby outlet and easily accessible. Use certified power adapters and chargers.
7. Follow local laws and regulations when using the headphones.
8. Store the headphones and any accessories that may contain small parts out of reach of children. Otherwise, children may damage the headphones or swallow small parts.
9. Do not use these headphones in dusty, humid, dirty environments or near sources of magnetic interference.
10. Do not disassemble or modify the headphones or their accessories. This may void the manufacturer's warranty.
11. If the device is faulty, contact an authorized service center.

12. Care and Comfort

The metal contacts of the headphones must be clean. Otherwise, the headphones could malfunction. If you experience discomfort while wearing these headphones, remove them and consult a doctor.

13. Troubleshooting

If you experience issues with the headphones, try the following:

- Charge the headphones.
You might resolve some problems by charging them.
- Restart the headphones.
Turning them off and back on may resolve the issue.
- Reset the headphones to factory settings (see the «Factory Reset» section). Resetting them may resolve the issue.

If the above steps do not help resolve the issue, contact a qualified technician.

14. Safe Disposal Guidelines



This symbol means that the headphones should be disposed of at special collection points at the end of their service life. Proper disposal at special collection points ensures compliance with electronic waste regulations and promotes resource conservation. This, in turn, protects human health and the environment. For more information, contact your local municipal administration, waste disposal service, or the retailer where the device was purchased.

The specifications provided in this user manual may differ from the actual performance of the device.

The manufacturer is entitled to make changes to this manual without prior public notice. The illustrations shown in this manual are for reference only. All registered trademarks are the property of their respective owners.

15. Manufacturer and Importer Information

UNIVENT Engineering PTE LTD

Address: 100 Peck Seah street #10-18 PS100,
079333 Singapore

E-mail: support@univent-engineering.com

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Information

The device has been evaluated to meet general RF exposure requirement.

The device can be used in portable exposure condition, compliance with exposure requirements.

FCC-ID: 2BMEY-CWHPST